



# FLOATI G CRYSTALS

**COLOURWAYS** 



GOLDEN RAY CT001902



DUST SPARKLE CT001903



SOFT SHELL CT001904



WARM DUNE CT001905



NAUTICAL DAWN CT001907



CHARCOAL RIPPLE CT001906



MORNING BLUE CT001908



TRANQUIL TEAL CT001909



NEBULA BLUE CT001910



SUNLIT FERN CT001911



LUSH CANOPY CT001912



BLAZING SUNSET CT001913



GOLDEN SAND CT001914



SMOKY TWILIGHT CT001916



STEEL GLINT CT001917



FROSTED ALMOND CT001915









TRANQUIL TEAL CT001909

CHARCOAL RIPPLE CT001906







PURE GRA (E of sunlight and water inspired floor.

STEEL GLINT PROSTED ALMOND CT001917 CT001915












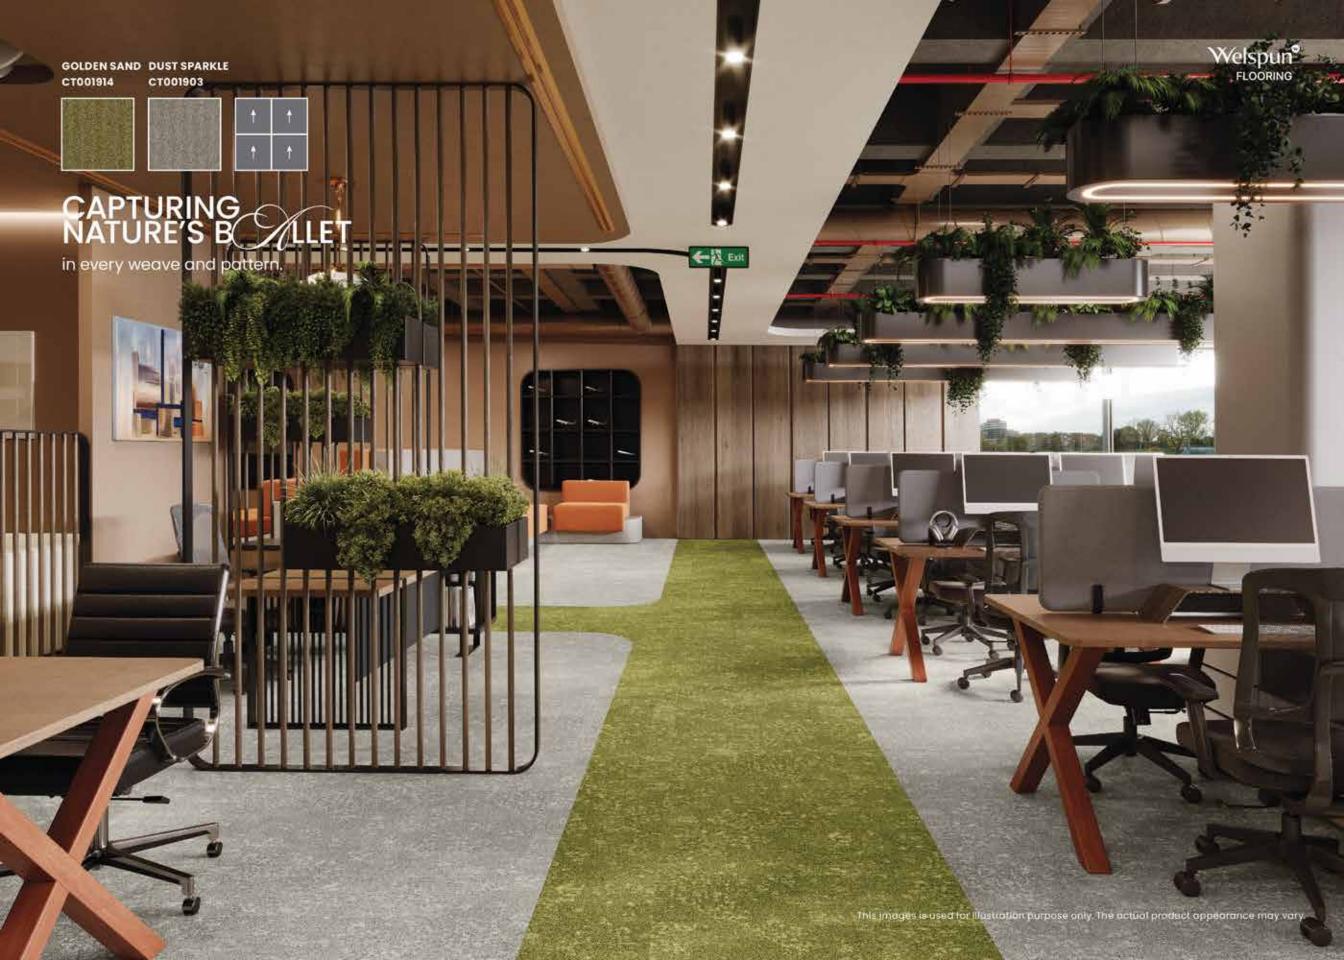

















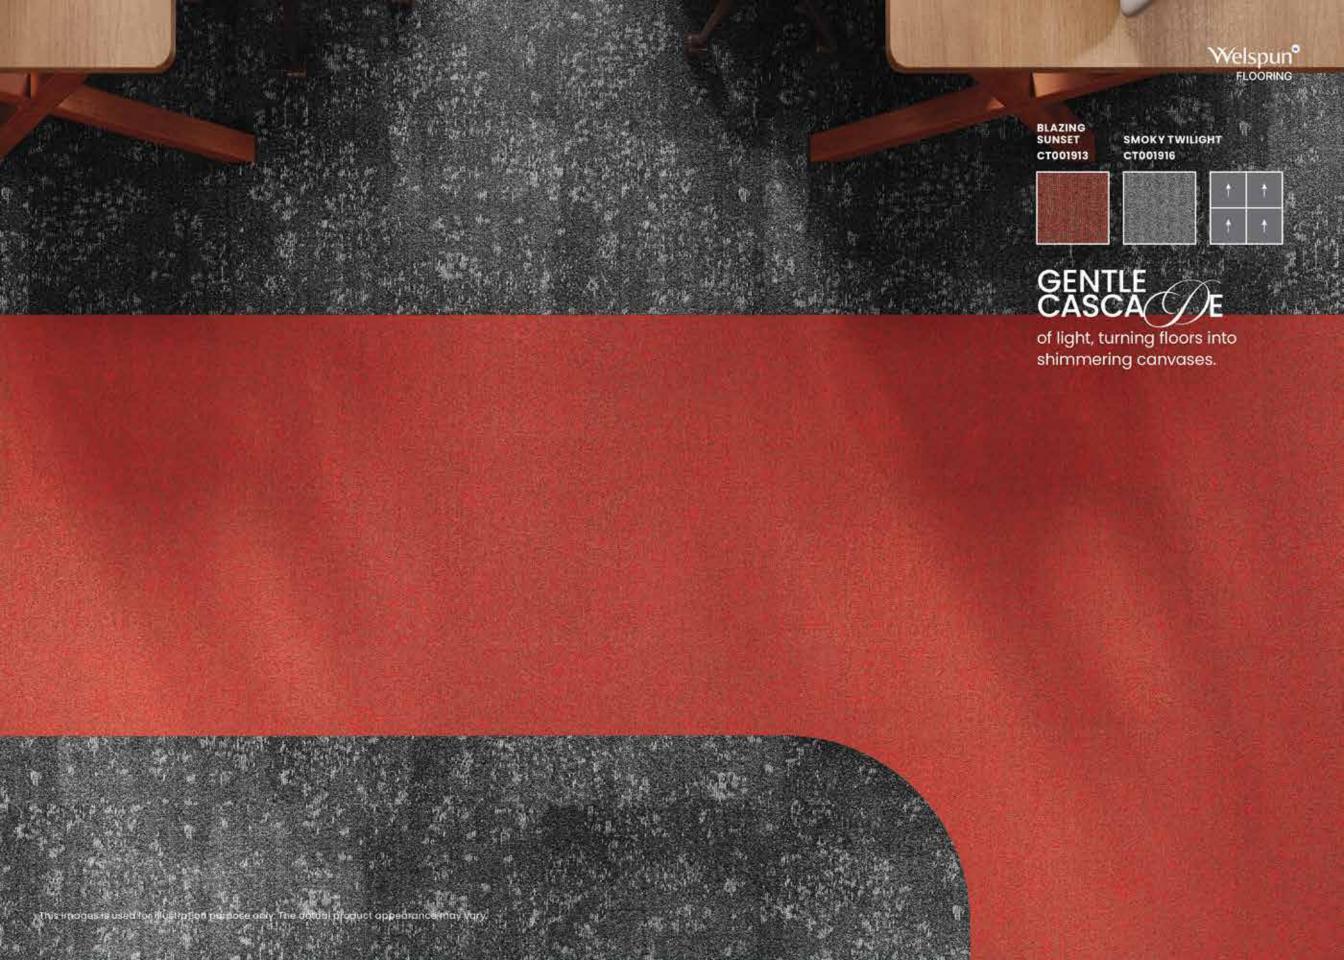





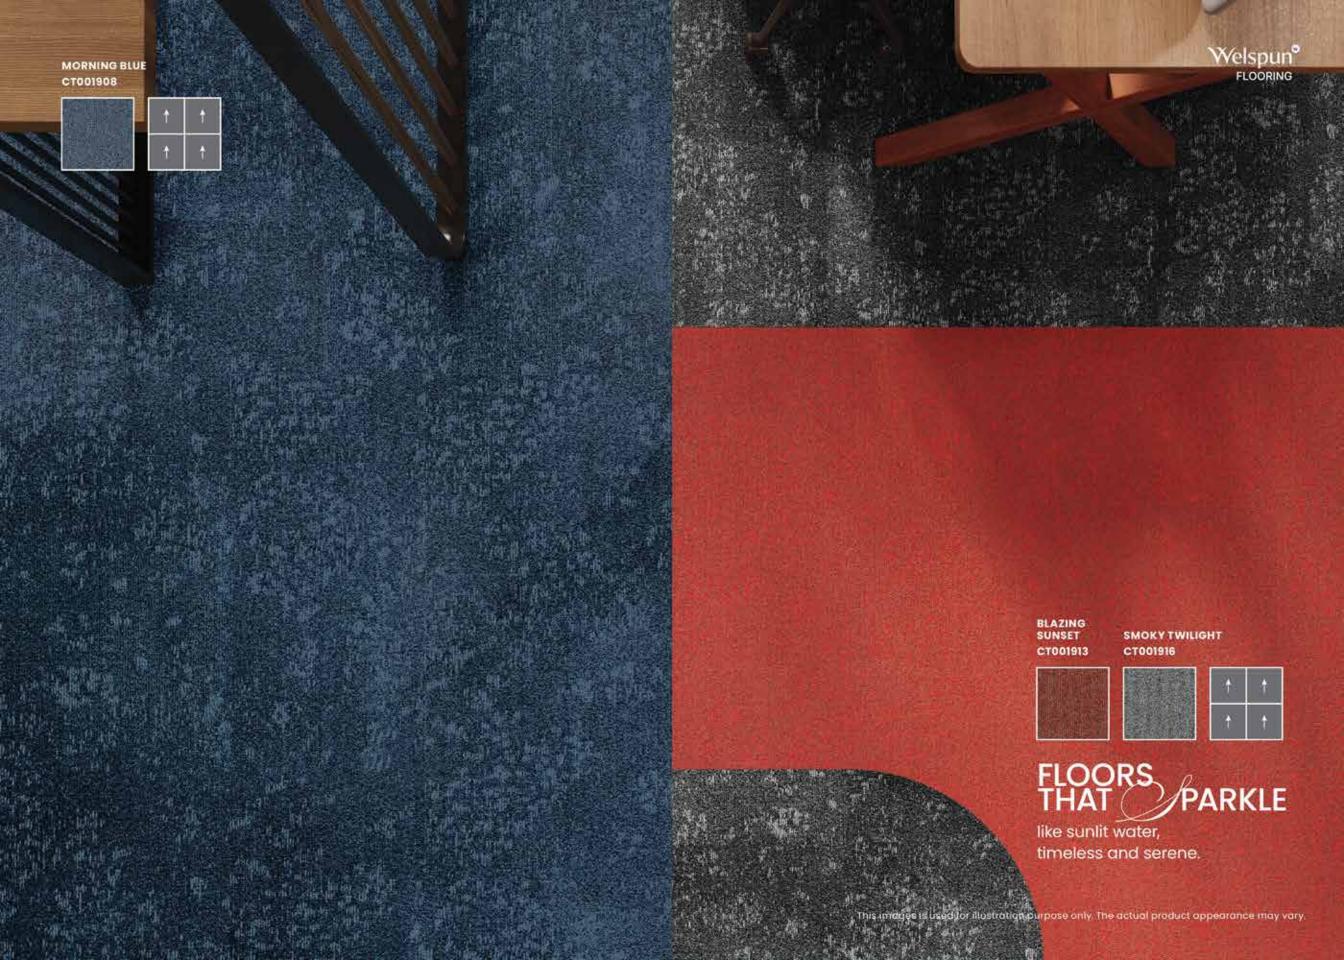

Since its inception in 1985, the Welspun Group has been committed to making India proud globally through its superior quality and innovative products and services. Its brilliant addition, Welspun Flooring, now has a modern manufacturing facility spread over an impressive 300 acres with an investment of more than 1150 cr. A break through in engineering and design, Welspun Flooring brings you a unique meeting of form and function in each collection. This distinctive quality appeals to Architects, Designers, Retailers and Consumers, offering them holistic flooring solutions that spur creative thinking and an elevated sense of design.

### TEST REPORT SUMMARY

Test Name	Method	Test Name	Method
Anti Microbial Treatment	AATCC 174 (Part II & III)	Colour fastness to bleach	AATCC 6
Delamination	ASTM D 3936	Static Electricity	AATCC 134-1996
Tuft Bind	ASTM 1335-67	Anti Static	ANSI/ESD S 7.1
Dimensional stability	ASTM D 7570	Castor Chair	DIN 54324
Pile weight	ASTM D 5848-07	Hexapod	ASTM D 5252-15
Pile density	ASTM D 5848-07	Static Coefficient	ASTM C 1028
Total thickness	ASTM D 6988-08	Dimensional stability (Aachen test)	DIN-STD-54318/ITTS-004
Pile height	ASTM D 5823-05a	Anti Soil	ASTM D 6540-05
Gauge	ASTM D 5793-13	Shampoo Fastness	AATCC 138
Tuft density	ASTM D 5848	Water Fastness	AATCC 107
Flammability (Pill Test)	ASTM D 2859	Velcro-Loops	ITTS 112
Flammability (Radiant Panel)	ASTM E 648-06	Heavy Traffic test (Walk test)	ASTM 6119-03
NBS Smoke Density (Flaming)	ASTM E 662-06	Sound transmission	ASTM C 423-17
Lightfastness	AATCC 16 E	Sound Absorption	ASTM C 423-17
Colour fastness to Ozone	AATCC 129	Static Loading	ISO 015/3415
Colour fastness to NO <sub>2</sub>	AATCC 164-2008	Green Carpet (VOC)	ASTM D 5116
Crocking Dry and Wet	AATCC 165-2008	Acoustic	BS EN ISO 354
Stain fastness	AATCC 175-2008/ITTS 002	Thermal Resistance	ASTM C 518

#### TRADEMARKS & TECHNOLOGIES



For colors that don't fade out, Welspun Floorings Ny6+™ is made up of a highly resilient fiber that is known for its superior color retention, strength, stain and fade resistance. With all this, your floor always retains its beauty come what may.



### Welspun Ecolite™

weight significantly but ensures a 40% less environment footprint than traditional carpets. Despite that, this backing retains the highest performance standards.



# Comfortile+™ (Optional)

With Comfortile+™, enjoy the most superior levels of safety, underfoot comfort and sound absorption. Equipped with a cushion back that is 20% more thicker, Comfortile+™ decreases sound reflection by 25% compared to hard back enabling you to enjoy quieter spaces which leads to better health.



# HealthyFloor™ (Optional)

We also have carpet tiles options with antiviral property. Tested and certified by ResInnova labs, we are the first company in India to offer antiviral carpet tiles. It eliminates 99.68% of virus thanks to a special coating of silver ion & titanium oxide.

# **FEATURES**



Nylon Tufted Product



Stain Resistance



Multiple Design Possibilities



Fade Resistance



Install



**During Installation** 



Maintain



Ideal For Heavy Foot Traffic



# PRODUCT SPECIFICATIONS IN CARPET TILES

Yarn 100% Solution Dyed Nylon (NY6+) Machine Gauge 1/12 loop Infinity Size in cm 50x50

Pile Thickness mm Total Thickness mm 4700 Density

Tufting Weight (Oz) 18 oz

Backing System Indicates

3.5-4 mm 5.5-6 mm 13

Welspun Ecolite or Comfortile

+/- 5%

Indicates +/-5%



SPI

























ISO 14001:2015 9001:2015 CERTIFIED CERTIFIED

45001:2018 CERTIFIED





# Address:

Welspun Global Brands Ltd, Survey No 190, Chandanvelly, Near Hythabad, Shabad Mandal, Ranga Reddy District, Telangana 501503, India

1800-120-1161

India: contact\_flooring@welspun.com Global: global\_saleswfl@welspun.com www.welspunflooring.com



L E-LOOKBOOK