
Relay 20









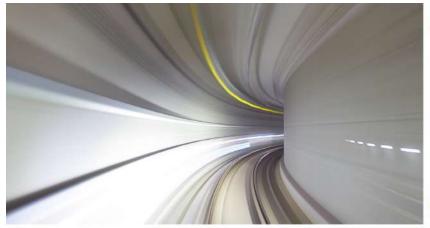





# GO RELAY



Bold, full of life and energy. That was our inspiration for our Relay Collection. Bright colours, bold lines all of which shout activity and energy. Ideal for your office spaces which radiate a sense of dynamism.

# Design Name : Shift



ORANGE | AC : CT000076



ELECTRIC BLUE | AC : CT000075



SEA WATER | AC : CT001148



BULLION | AC : CT001149



LIME | AC : CT001151



MIST | AC : CT001153



IRON | AC : CT001152

# Design Name : Passage



ORANGE | AC : CT000085



ELECTRIC BLUE | AC : CT000084



SEA WATER | AC : CT000167



BULLION | AC : CT000168



LIME | AC : CT000170



MIST | AC : CT000171

# **Design Name : Wave**



IRON | AC : CT000173






ORANGE | AC : CT000076

ORANGE | AC : CT000085




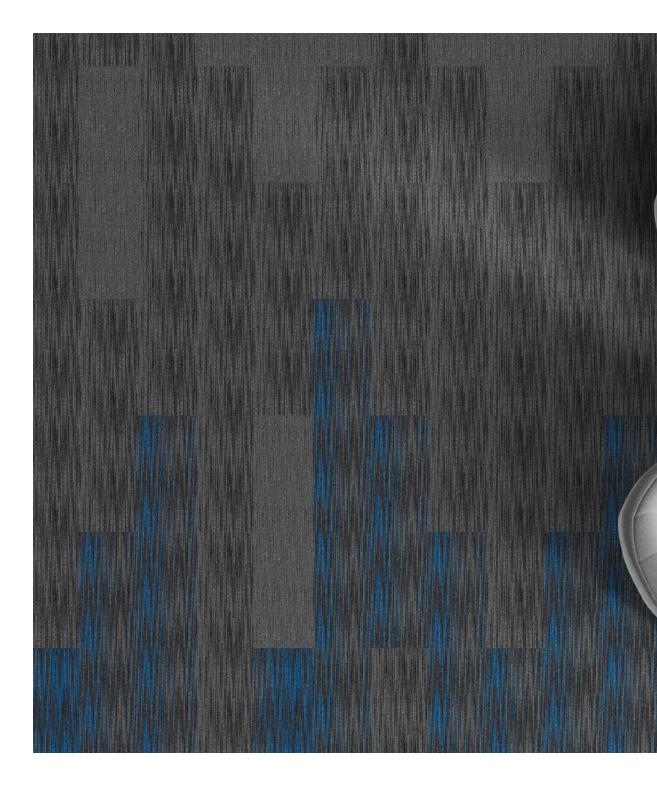




ELECTRIC BLUE | AC : CT000084


IRON | AC : CT001152

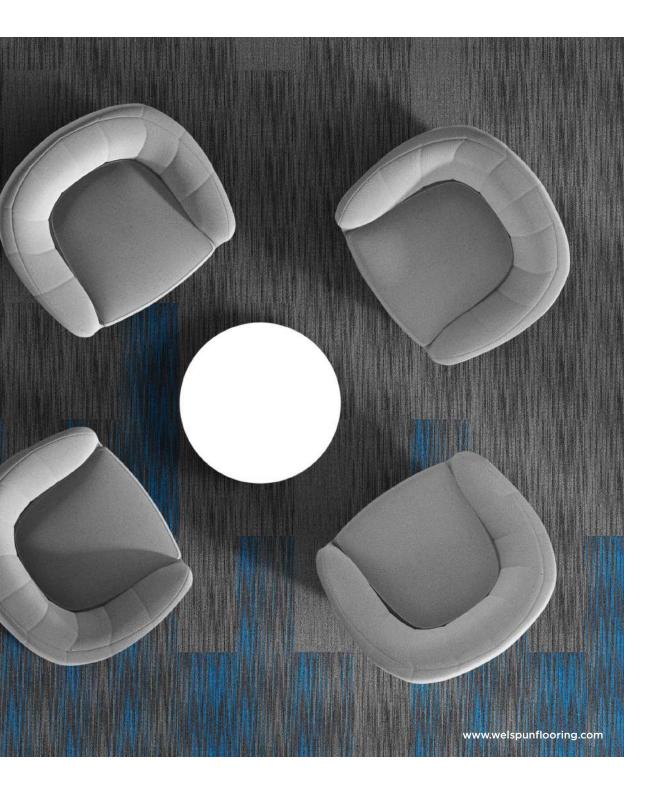





BULLION AC : CT000168

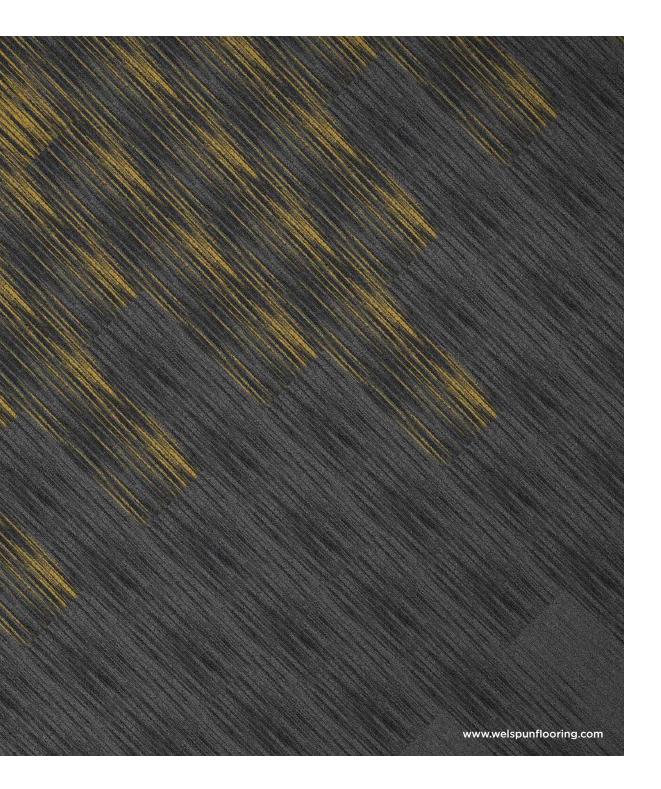





SEA WATER | AC : CT001148

MIST | AC : CT001153

MIST | AC : CT000171









ELECTRIC BLUE | AC : CT000084

BULLION | AC : CT000168




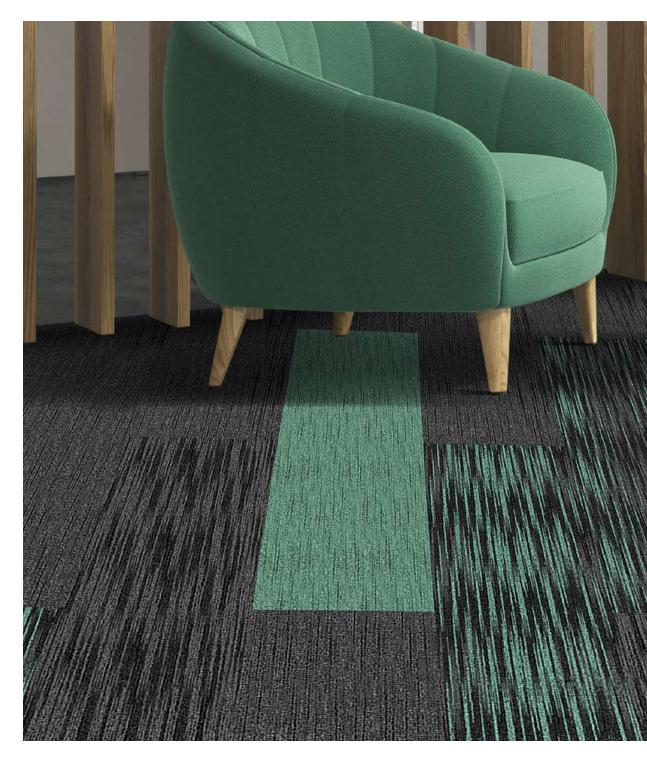



MIST| AC : CT001153

MIST | AC : CT000171

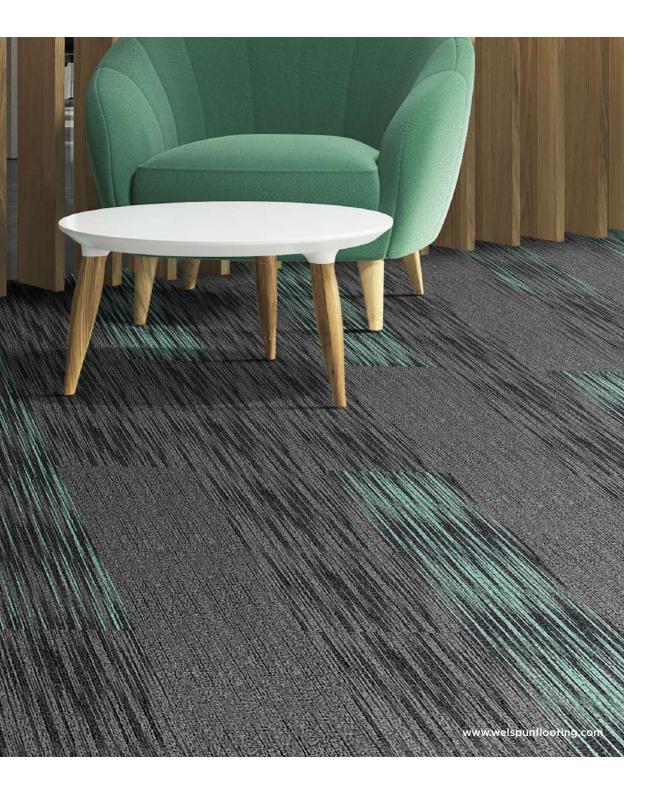



IRON | AC : CT001152





SEA WATER | AC : CT001148 ELECTRIC BLUE | AC : CT000084



# LAYING PATTERNS






























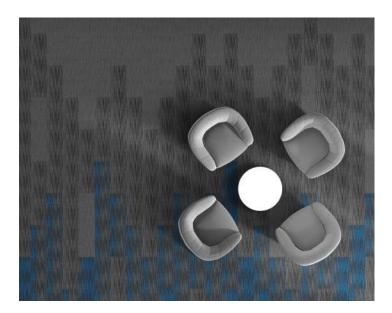



### WELSPUN CARPET TILES ADVANTAGES



Multiple Design Possibilities



Ideal For Heavy Foot Traffic



Stain Protect



Easy To Maintain



Easy To Install



Less Wastage During Installation



Fade Resistant



Made in India



Less Lead Time

### **TRADEMARKS & TECHNOLOGIES**



### NY6+™

For colors those don't fade out, Welspun Floorings Ny6+™ is made up of a highly resilient fiber that is known for its superior color retention, strength, stain and fade resistance. With all this, your floor always retains its beauty come what may.



### Welspun Ecolite<sup>™</sup>

Welspun Ecolite<sup>™</sup> is a lightweight backing that not only reduces the overall weight significantly but ensures a 40% less environment footprint than traditional carpets. Despite that, this backing retains the highest performance standards.



### **HealthyFloor**<sup>™</sup> (Optional)

We also have carpet tiles options with antiviral property. Tested and certified by ResInnova labs, we are the first company in India to offer antiviral carpet tiles. It eliminates 99.68% of virus thanks to a special coating of silver ion and titanium oxide.



### **Comfortile**<sup>™</sup> (Optional)

With Comfortile<sup>™</sup> backing, our tiles come with a customized felt-back that not only offers great underfoot comfort but also sound absorption. Comfortile<sup>™</sup> provides extra levels of protection and support for high levels of acoustic and ergonomic support.

# **PRODUCT SPECIFICATION**

Machine	1/12 Infinity	
Filament	69	
Yarn Details	100% Nylon Type-6	
Size in centimeter	25x100cm	
GSM*	594	
Finished pile thickness*	Up to 3 mm	
Density	Min. 5800	
Total thickness*	4-5 mm	
Tufted pile wt OZ (Sq Yard)*	18	
Dye method	Solution Dyed	
Fiber Type	Nylon	
Stitch 10 cm	43	
Backing Material	PVC	
PVC GSM	2000	
No of pcs per box	20	
Sqft/box	53.8	
Sqm/box	5	
Shape (Plank or tile)	Plank	
SPI	11	
Soil Release Technology	Perma Seal Env	
GSA Stain Release Rating Foot Traffic	Pass	
Recommendation TARR	Severe	
*Tolerance (+-)%	5%	

TEST REPORT SUMMARY			
Test Name	Method	Test Name	Method
Anti Microbial Treatment	AATCC 174 (Part II & III)	Colour fastness to bleach	AATCC 6
Delamination	ASTM D 3936	Static Electricity	AATCC 134-1996
Tuft Bind	ASTM 1335-67	Anti Static	ANSI/ESD S 7.1
Dimensional stability	ASTM D 7570	Castor Chair	DIN 54324
Pile weight	ASTM D 5848-07	Hexapod	ASTM D 5252-15
Pile density	ASTM D 5848-07	Static Coefficient	ASTM C 1028
Total thickness	ASTM D 6988-08	Dimensional stability (Aachen test)	DIN-STD-54318/ITTS-004
Pile height	ASTM D 5823-05a	Anti Soil	ASTM D 6540-05
Gauge	ASTM D 5793 - 13	Shampoo Fastness	AATCC 138
Tuft density	ASTM D 5848	Water Fastness	AATCC 107
Flammability (Pill Test)	ASTM D 2859	Velcro-Loops	ITTS 112
Flammability (Radiant Panel)	ASTM E 648-06	Heavy Traffic test (Walk test)	ASTM 6119-03
NBS Smoke Density (Flaming)	ASTM E 662-06	Sound transmission	ASTM C 423-17
Lightfastness	AATCC 16 E	Sound Absorption	ASTM C 423-17
Colour fastness to Ozone	AATCC 129	Static Loading	ISO 015/3415
Colour fastness to $NO_2$	AATCC 164-2008	Green Carpet (VOC)	ASTM D 5116
Crocking Dry and Wet	AATCC 165-2008	Acoustic- Nylon	BS EN ISO 354
Stain fastness	AATCC 175-2008/ITTS 002	Thermal Resistance	ASTM C 518

### CERTIFICATIONS





To transform your flooring, just get in touch with us:

### **Contact us:**

№1800 120 1161
Scontact\_flooring@welspun.com

### Address:

Welspun Global Brands Ltd, Survey No 190, Chandanvelly, Near Hythabad, Shabad Mandal, Ranga Reddy District, Telangana 501503, India www.welspunflooring.com