

Wabi Sabi 2.0

Crack - Carpet Tiles



WELSPUN
FLOORING

Crack

Inspired by an age old art form dating back to the 15th century, the Crack Collection draws its attributes from Kintsugi, the Japanese art of repairing broken pottery by mending the areas of breakage with lacquer, dusted or mixed with powdered gold, silver, or platinum.

The intention is to embrace the imperfections as a part of the history of an object, rather than something to disguise.



Design Name : Crack



STORM | AC: CT001041



PLATINUM | AC: CT001040



RHINO | AC: CT001039




ROYAL BLUE | AC: CT001054




LIME | AC: CT001048

Design Name : Crack

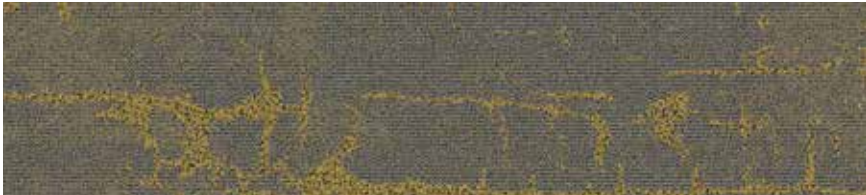

MARIGOLD | AC: CT001050

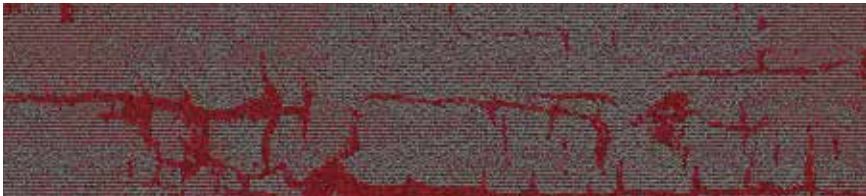

CAYENNE | AC: CT001044



MERLOT | AC: CT001052

PRODUCT SPECIFICATIONS	
Yarn	Nylon
Machine / Gauge	1/10 Loop Infinity
Tufted Weight(Oz)	20
Density	Min. 6000
Total Thickness(mm)	4 to 5
Pile Thickness(mm)	Upto 4
Backing Type	PVC
SPI	12
Size(cm)	Plank (25X100)



www.welspunflooring.com

COLORWAYS



ROYAL BLUE | AC: CT001054



STORM | AC: CT001041



PLATINUM | AC: CT001040



COLORWAYS



MARIGOLD | AC: CT001050



STORM | AC: CT001041



PLATINUM | AC: CT001040



COLORWAYS



LIME | AC: CT001048



STORM | AC: CT001041



PLATINUM | AC: CT001040



www.welspunflooring.com

COLORWAYS




MERLOT | AC: CT001052



STORM | AC: CT001041



PLATINUM | AC: CT001040

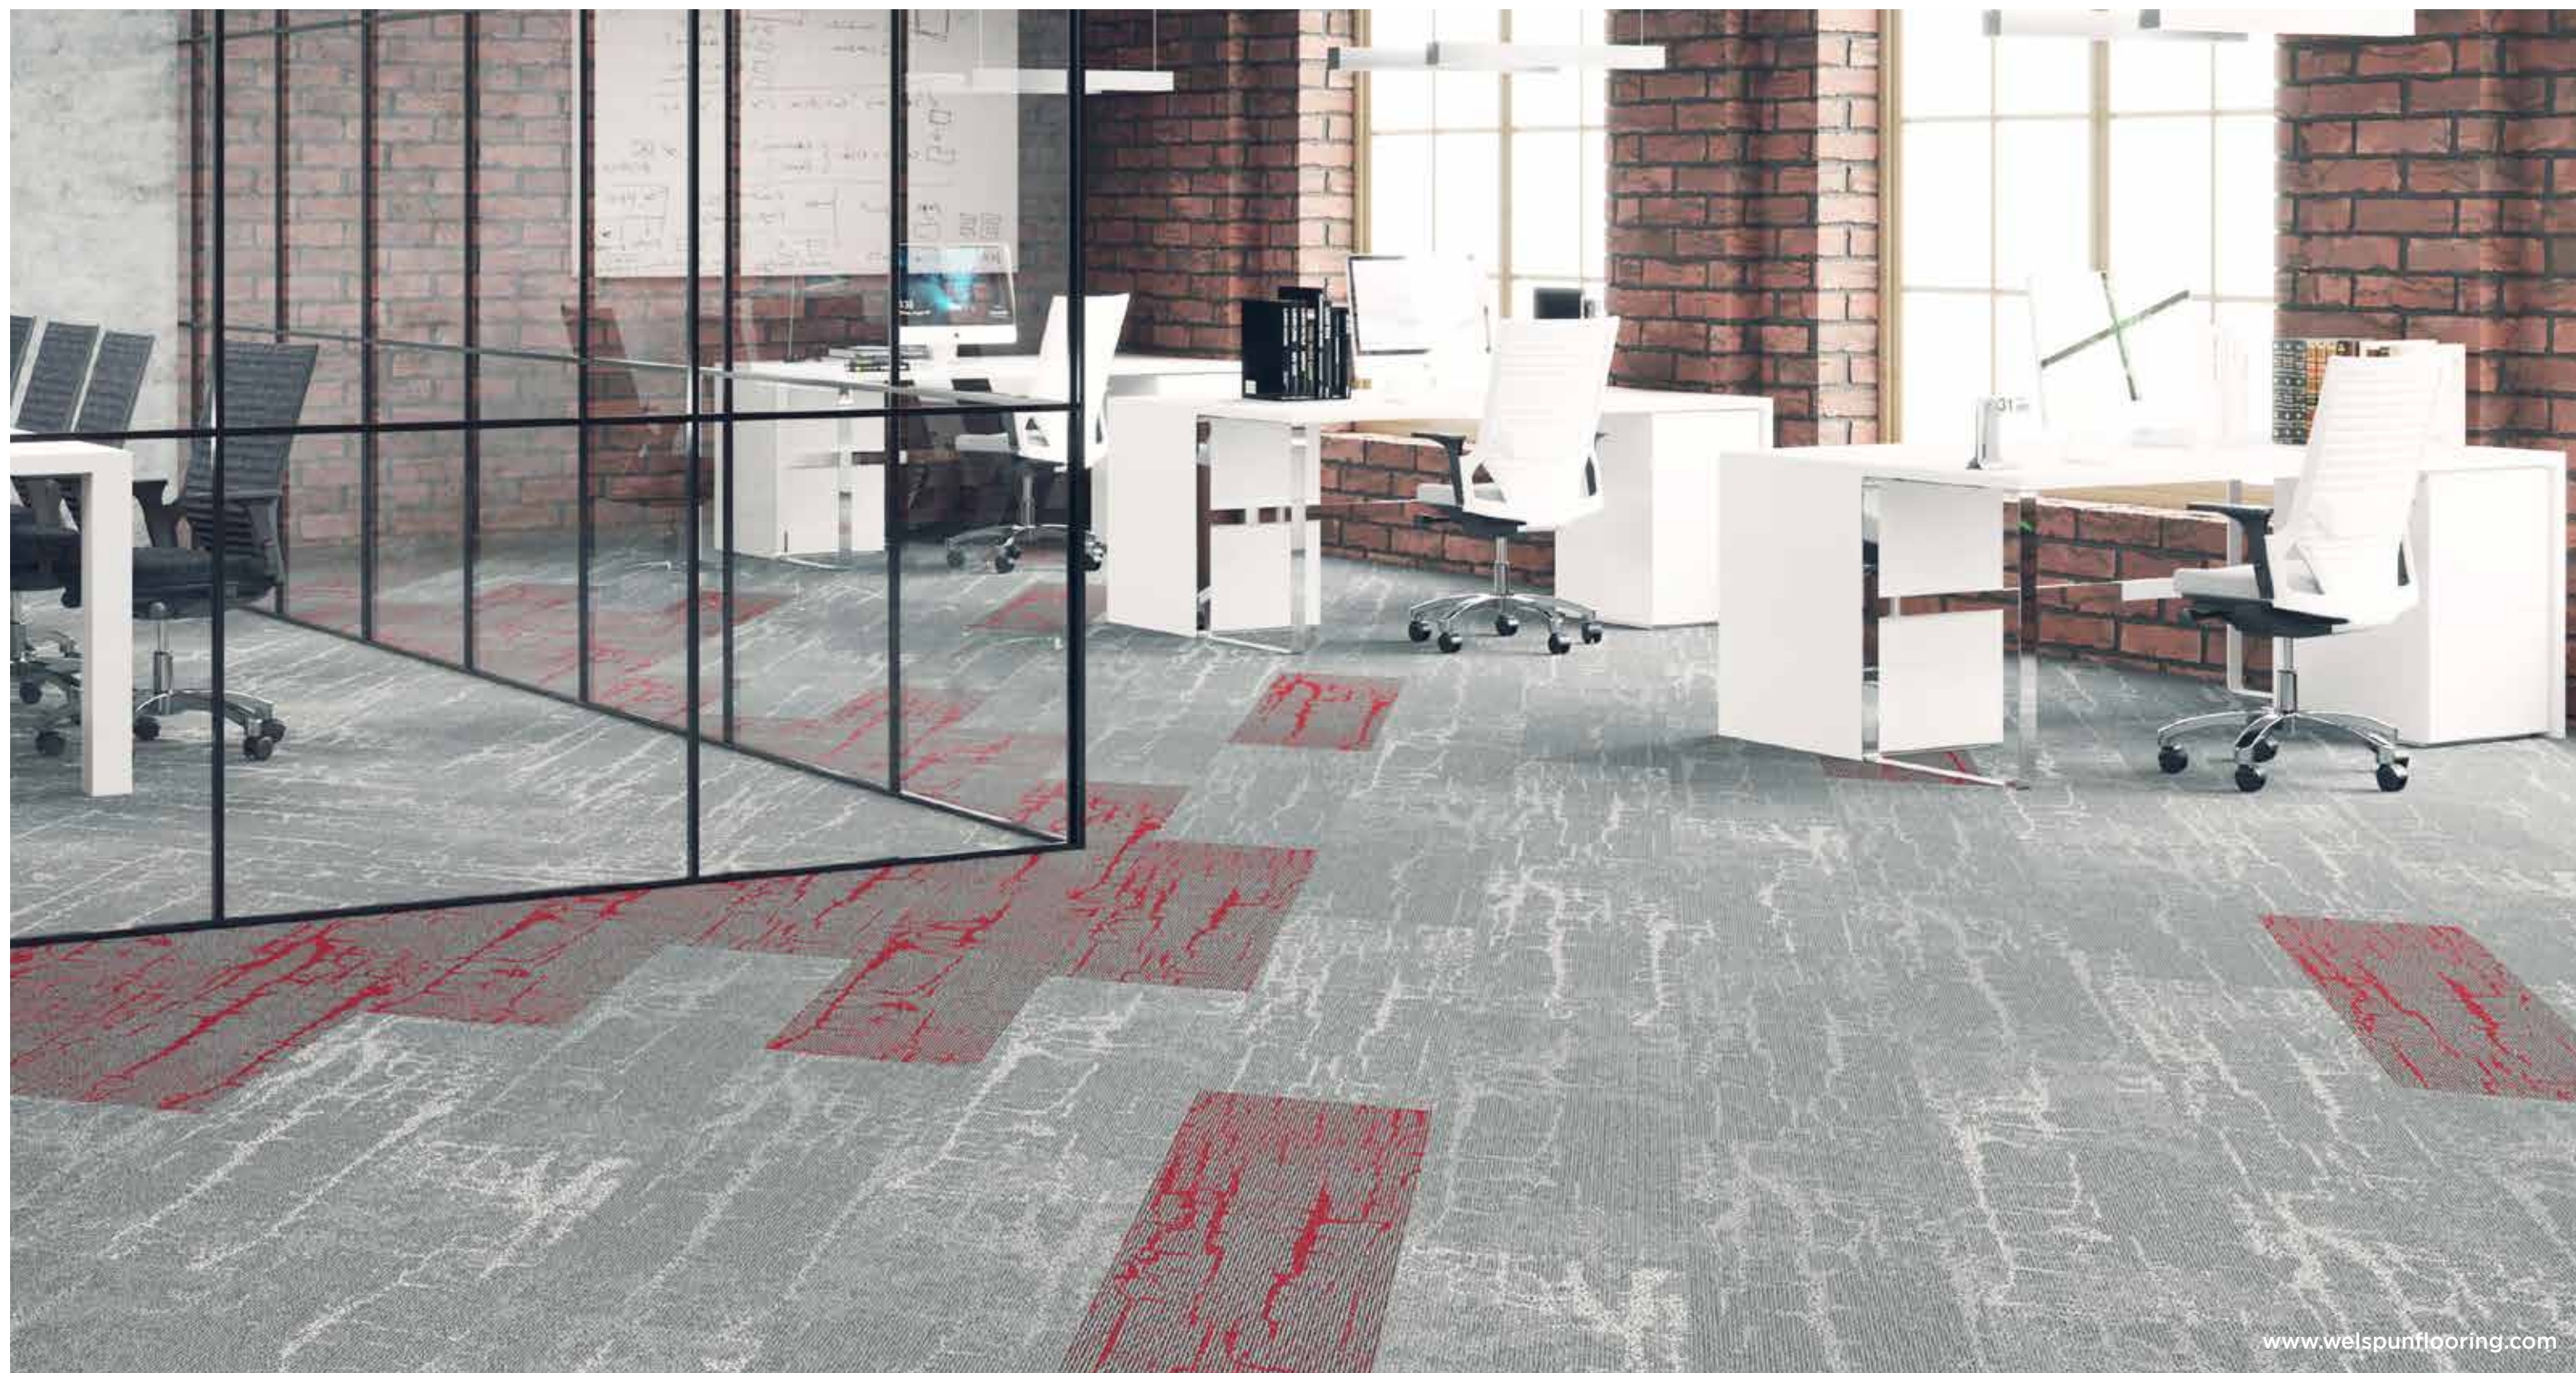

COLORWAYS



CAYENNE | AC: CT001044




STORM | AC: CT001041




PLATINUM | AC: CT001040

WELSPUN CARPET TILES ADVANTAGES




Multiple Design Possibilities



Solution Dyed Tufted Product




Ideal For Heavy Foot Traffic



Stain Protect



Easy To Maintain




Easy To Install



Offers Sound Insulation



Reduces Wastage During Installation




Fade Resistant



Made in India




40% Less Environmental Footprint



Less Lead Time

TRADEMARKS & TECHNOLOGIES




NY6+™

For colors those don't fade out, Welspun Floorings Ny6+™ is made up of a highly resilient fiber that is known for its superior color retention, strength, stain and fade resistance. With all this, your floor always retains its beauty come what may.



Welspun Ecolite™

Welspun Ecolite™ backing is made up of lightweight PVC that not only reduces the overall weight significantly but ensures a 40% less environment footprint than traditional carpets. Despite that, this backing retains the highest performance standards.



Now also available with **Healthy Floor™** (Optional)

We also have carpet tiles options with **antiviral property**. Tested and certified by Reslnnova labs, we are India's first antiviral carpet tiles. It kills 99.68 % human corona virus because of a special coating of silver iron and titanium oxide. We make healthy floors.





Comfortile™ (Optional)

With Comfortile™ backing, our tiles come with a customized felt-back that not only offers great underfoot comfort but also sound absorption. Comfortile™ provides extra levels of protection and support for high levels of acoustic and ergonomic support.







CERTIFICATIONS



LAYOUT PATTERNS

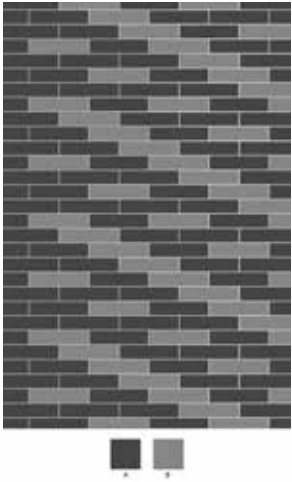

LAYOUT PATTERNS

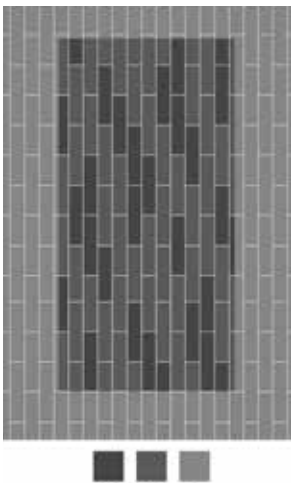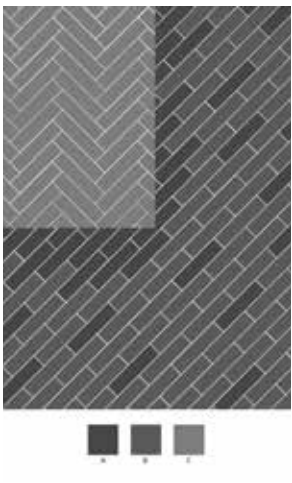

TEST REPORT SUMMARY			
Test Name	Method	Test Name	Method
Anti Microbial Treatment	AATCC 174 (Part II & III)	Colour fastness to bleach	AATCC 6
Delamination	ASTM D 3936	Static Electricity	AATCC 134-1996
Tuft Bind	ASTM 1335-67	Anti Static	ANSI/ESD S 7I
Dimensional stability	ASTM D7570	Castor Chair	DIN 54324
Pile weight	ASTM D5848-07	Hexapod	ASTM D 5252-15
Pile density	ASTM D5848-07	Static Coefficient	ASTM C1028
Total thickness	ASTM D6988-08	Dimensional stability	DIN-STD-54318/ITTS-004
Pile height	ASTM D5823-05a	(Aachen test)	
Gauge	ASTM D5793 - 13	Anti Soil	ASTM D6540-05
Tuft density	ASTM D5848	Shampoo Fastness	AATCC 138
Flammability (Pill Test)	ASTM D2859	Water Fastness	AATCC 107
"Flammability (Radiant	ASTM E 648-06	Velcro-Loops	ITTS 112
Panel)"		Heavy Traffic t est (Walk	ASTM6119-03
NBS Smoke Density	ASTM E 662-06	test)	
(Flaming)		Sound transmission	ASTMC423-17
Lightfastness	AATCC 16 E	Sound Absorption	ASTMC423-17
Colour fastness to Ozone	AATCC 129	Static Loading	ISO 015/3415
Colour fastness to NO2	AATCC 164-2008	Green Carpet (VOC)	ASTM D5116
Crocking Dry and Wet	AATCC 165-2008	Acoustic- Nylon	BS EN ISO 354
Stain fastness	AATCC 175-2008/ITTS 002	Thermal Resistance	ASTM C 518



WELSPUN

FLOORING

To transform your flooring, just get in touch with us:

Address:

Welspun Global Brands Ltd,
Survey No 190, Chandanvelly, Near Hythabad, Shabad Mandal,
Ranga Reddy District, Telangana 501503, India

Contact us:

☎ 1800 120 1161

✉ contact_flooring@welspun.com

www.welspunflooring.com